


Aputure Spotlight Mount User Manual

Thank you for purchasing an Aputure product.

The Aputure Spotlight Mount is a high precision optical accessory. Its built-in Bowens mount allows it to be attached to all Aputure LightStorm COB products, such as the 120d, 120d II, 300d, and more.

Fixture Components

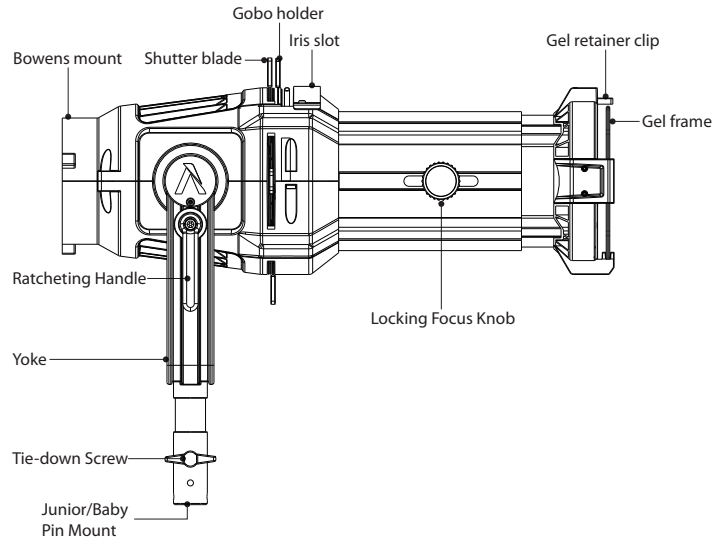

Main Features

- Aluminum alloy die castings. Durable and lightweight design.
- Precision optical system gives a high output, high resolution, and even beam.
- Interchangeable spotlight lens design with option of 19, 26, and 36 degree lenses.
- Three-layer-shutter allows for more flexible light shaping.
- Standard Bowens mount.
- Dual slot design allows for the use of iris and Gobos (B size) simultaneously.
- Accessories: Gobo x3 (Tree, Window, Abstract), Gobo holder x1, Gel holder x1.
** Iris sold separately.*

Package includes




- Spotlight Mount x1
- Gobo Holder x1
- Gel Frame x1
- Gobo Pattern x3
- Lens Cleaning Kit x1

Specifications

1. Brightness with different light fixture at different distance

Model	Distance	Beam Diameter	19°		26°		36°	
			Brightness /Lux	Brightness /Fc	Brightness /Lux	Brightness /Fc	Brightness /Lux	Brightness /Fc
120d	1.5 m /5 ft	42 cm /16 inches	15740	1471	9910	926	5870	549
120d II			23590	2205	13900	1299	8040	751
300d			24330	2274	20100	1879	12350	1154
120d	3 m /10 ft	90 cm /35 inches	3860	361	2387	223	1376	129
120d II			6280	587	3620	338	2175	203
300d			5970	558	4910	459	3250	304
120d	5 m /16 ft	154 cm /60 inches	1435	134	855	80	509	48
120d II			2283	213	1281	120	772	72
300d			2300	215	1872	175	1270	119
120d	10 m /32 ft	314 cm /123 inches	372	35	232	22	144.5	14
120d II			554	52	318	30	196.8	18
300d			560	52	498	47	332.7	31

2. Cosine diagram for uniformity

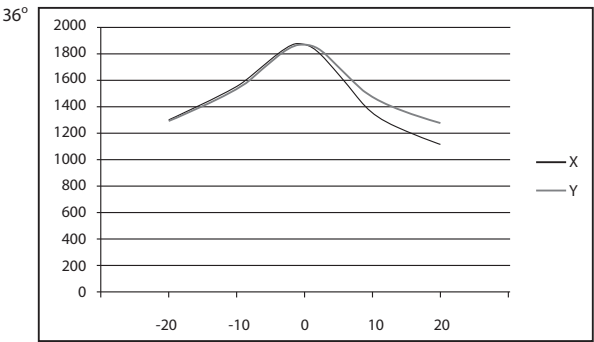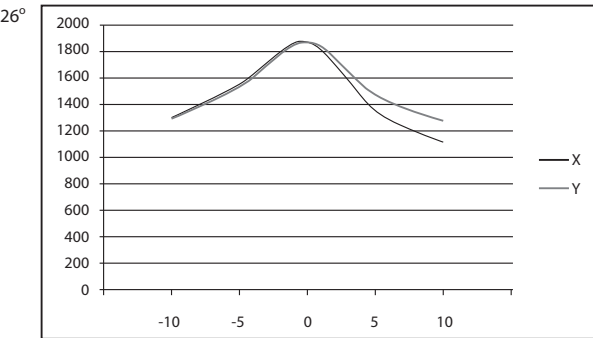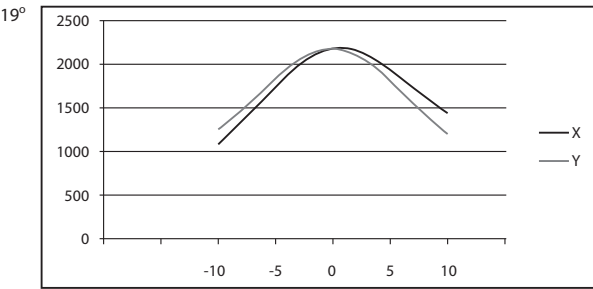

3. Size & Weight

Product Dimensions	434.5x218.7x357mm/17.1x8.6x14.1"
Box Dimensions	455x290x260mm/17.9x11.4x10.2"
Weight	19° 4.59kg/10.1lbs
	26° 5.02kg/11.1lbs
	36° 5.11kg/11.3lbs

⚠ High temperature warning

When the spotlight mount is attached to the 300d, the surface temperature can reach up to 70 Degree C. Please do not touch it with your hands.

Detailed product manual for Spotlight mount can be found on www.aputure.com

Aputure® | GUARANTEE CARD

Service Warranty (EN)

Aputure photo tech ltd warrants the original consumer purchaser from defects in material and workmanship for a period of one (1) year after the date of purchase.For more details of warranty visit www.aputure.com

Important: Keep your original sales receipt. Be sure the dealer has written on it the date, serial No. of the product. This information is required for warranty service.

This warranty does not cover:

- Damage that is the result of misuse, abuse, accident (including but not limited to damage by water), faulty connection, defective or misadjusted associated equipment, or the use of the product with equipment for which it was not intended.
- Cosmetic defects that appear more than thirty (30) days after the date of purchase. Cosmetic damage caused by improper handling is also excluded.
- Damage that occurs while the product is being shipped to whoever will service it.

This warranty is void if:

- The product identification or serial No. label is removed or defaced in any way.
- The product is serviced or repaired by any one other than Aputure or an authorized Aputure dealer or service agency.

Aputure Imaging Industries Co. Ltd.

Add: F3, Building 21, Longjun industrial estate,

HuFeng West Road, Shenzhen, Guangdong


E-MAIL: cs@aputure.com

Sales Contact: (86)0755-83285569-613

感谢购买爱图仕产品。

爱图仕Spotlight Mount是一个高品质光学系统组成的光学附件，经过严密的光学计算和实验研发而成，搭配爱图仕光风暴系列120d II、300d、120d灯体，可以使爱图仕摄影的瞬间变成聚光灯、追光灯和投影灯。

产品形态

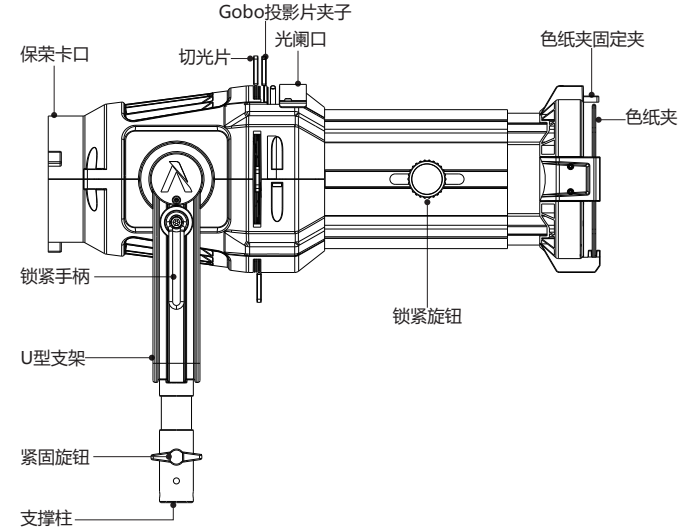

基本功能

- 铝合金压铸，轻便结实耐用；
- 精密高效光学系统，高输出，高分辨率，高均匀性；
- 可自助更换镜头，镜头选择19/26/36度；
- 三层切光片设计，灵活切光塑性；
- 标准保荣工业卡口；
- 预留Gobo卡槽，光阑卡槽，标准B size Gobo；
- 附件搭配：Gobo片3pcs，Gobo夹一个，色纸夹一个。
** 光阑需要单独购买*

装箱清单




- 光风暴聚光筒 x1
- Gobo投影片夹 x1
- 色纸夹 x1
- Gobo 图案片 x3
- 清洁套装 x1

规格参数

1. 搭配不同LED灯，在不同距离下的照度值及光斑大小

型号	距离	发光面直径	19°		26°		36°	
			亮度/照度	亮度/烛光尺寸	亮度/照度	亮度/烛光尺寸	亮度/照度	亮度/烛光尺寸
120d	1.5 m /5英尺	42 cm /16英寸	15740	1471	9910	926	5870	549
120d II			23590	2205	13900	1299	8040	751
300d			24330	2274	20100	1879	12350	1154
120d	3 m /10英尺	90 cm /35英寸	3860	361	2387	223	1376	129
120d II			6280	587	3620	338	2175	203
300d			5970	558	4910	459	3250	304
120d	5 m /16英尺	154 cm /60英寸	1435	134	855	80	509	48
120d II			2283	213	1281	120	772	72
300d			2300	215	1872	175	1270	119
120d	10 m /32英尺	314 cm /123英寸	372	35	232	22	144.5	14
120d II			554	52	318	30	196.8	18
300d			560	52	498	47	332.7	31

2. 光斑均匀度余弦曲线图

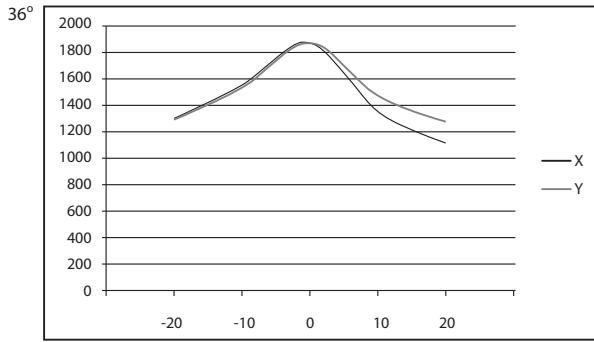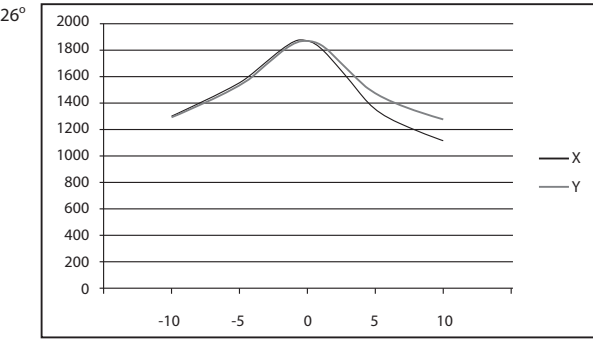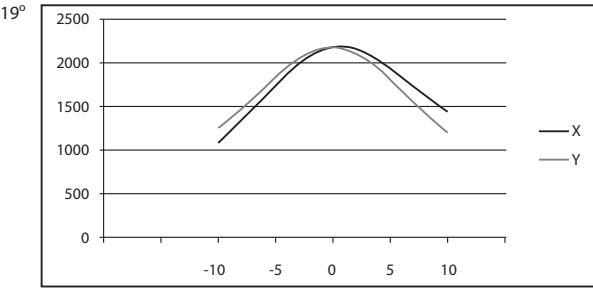

3. 尺寸 & 重量

产品尺寸	434.5x218.7x357mm/17.1x8.6x14.1"
箱子尺寸	455x290x260mm/17.9x11.4x10.2"
重量	19° 4.59kg/10.1lbs
	26° 5.02kg/11.1lbs
	36° 5.11kg/11.3lbs

⚠ 高温警告

本产品在长时间搭配300D使用时，产品表面温度可以达到70摄氏度以上，请尽量不要用手触摸。

您可以在本公司网站 <http://www.aputure.com/cn> 下载本产品的详细使用者指南。

Aputure® | 保修卡

保修条款 (中文)

本公司对产品第一类主客户提供为期一年的质量保证服务。质保内容和细节，请查阅我们的网站www.aputure.com

重要说明:

请保留您原始购买单据及保修卡，确定您购买的供应品资料都在此单据，同时包括您的购买日期，产品序列号等，这些资料将质保服务时都会需要提供。

质保范围不包括:

- 产品不当使用，破坏，意外，错误接线，不良或失调的外接装置，不适合的外接装置所造成的损坏（包括暴露于雨水等损坏），不在质保范围。
- 自购买日起 天后对产品外观的损坏，或是不当的表面处理接触造成的外观损坏，不在质保范围。
- 经销售运送到所造成的损坏，不在质保范围。

质保无效说明:

- 产品序列号标识已经被撕去或无法辨识，本质保条款无效
- 产品未经本公司或者指定授权维修公司的检修及改装，本质保条款无效

深圳市爱图仕影像器材有限公司


地址: 广东省深圳市龙华和平西路园九发发工业区21栋3楼

邮编: cs@aputure.com

销售热线: (0755) 83285569-613

售后服务: 400-0999-028

折页方式:



为折线(不印刷)

折页成型 (英文在正面):



Aputure® 深圳市爱图仕影像器材有限公司		
设计项目	118总册书	图号
尺寸(mm)	630*105mm 折页尺寸: 105*105mm	版本
材质/工艺	70g 书纸, 正反两面印刷	设计/排
备注	料号: 511800070001	日期